


**SPECIFICATIONS** **CBD30Y1G1D**
**PACKAGE OUTLINES**

**Notes:**

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25$ mm (0.01") unless otherwise noted.
3. Specification are subject to change without notice.

Part Number	Chip Material	Color of Emission	Lens Type	Viewing Angle
CBD30Y1G1D	GaAsP/GaP	Yellow	Yellow Diffused	60°
	GaP	Green	Green Diffused	60°

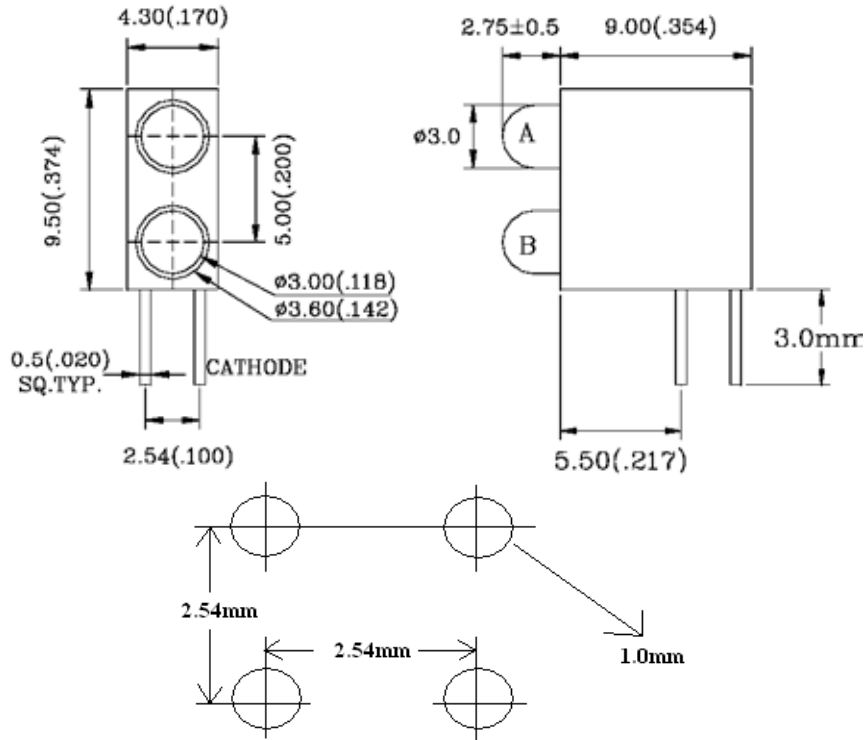

ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.chromeled.com](http://www.chromeled.com)

**ABSOLUTE MAXIMUM RATINGS**
**(TA=25°C)**

Parameter	Symbol	Max Rating	Unit
Forward current	I <sub>f</sub>	30	mA
Reverse current @ 5V	I <sub>r</sub>	10	μA
Power dissipation	P <sub>d</sub>	100	mW
Operating temperature range	T <sub>opr</sub>	-40~+80	°C
Storage temperature range	T <sub>stg</sub>	-40~+100	°C
Peak pulsing current (1/10 duty f= 10KHz)	I <sub>fp</sub>	160	mA
Soldering Temperature	T <sub>SOL</sub>	Max 260°C for 5 sec Max	

**OPTICAL-ELECTRICAL CHARACTERISTICS**
**(TA=25°C)**

Parameter	Symbol	Test Condition	Value			Unit
			Min	Typ	Max	
Wavelength at peak emission	λ <sub>peak</sub>	I <sub>F</sub> = 20mA	-	585	-	nm
			-	565	-	
Spectral half bandwidth	Δλ	I <sub>F</sub> = 20mA	-	30	-	nm
			-	30	-	
Dominant wavelength	λ <sub>D</sub>	I <sub>F</sub> = 20mA	-	588	-	nm
			-	567	-	
Forward Voltage	V <sub>f</sub>	I <sub>F</sub> = 20mA	1.7	2.1	2.8	V
			1.7	2.1	2.8	
Luminous intensity	I <sub>v</sub>	I <sub>F</sub> = 20mA	2.5	12.5	-	mcd
			2.5	12.5	-	

\*NOTE: 1. The forward voltage data did not including ±0.1V tolerance 2. The luminous intensity data did not including ±15% tolerance



ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.chromeled.com](http://www.chromeled.com)