


**SPECIFICATION** **CSHF1212B2C**
**PACKAGE OUTLINES**


- Notes:
1. All dimensions are in millimeters (inches).
  2. Tolerance is  $\pm 0.25\text{mm}$  (0.01") unless otherwise noted.
  3. Specifications are subject to change without notice.

Part Number	Chip Material	Color of Emission	Lens Type	Viewing Angle
CSHF1212B2C	InGaN	Blue	Water Clear	110°

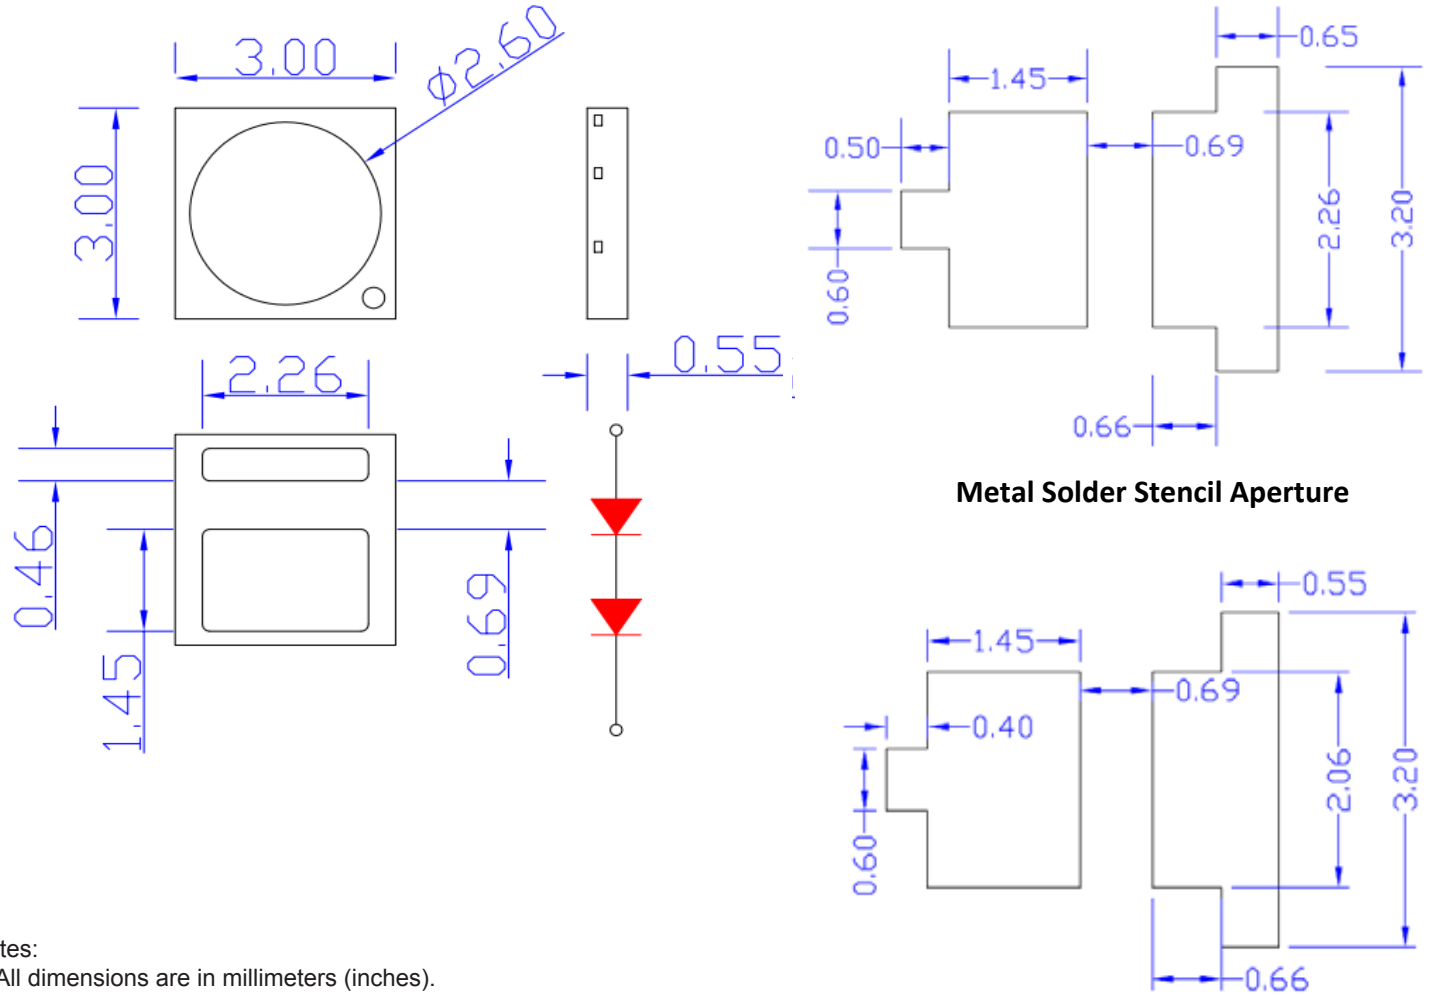

ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.chromeled.com](http://www.chromeled.com)

**ABSOLUTE MAXIMUM RATINGS**
**(TA=25°C)**

Parameter	Symbol	Max Rating	Unit
Power Dissipation	P <sub>D</sub>	1.63	W
Forward Current	I <sub>F</sub>	240	mA
Reverse Voltage	V <sub>R</sub>	5	V
Operating Temperature Range	T <sub>OP</sub>	-40~+85	°C
Storage Temperature Range	T <sub>STG</sub>	-40~+100	°C
Peak Pulsing Current (1/10 duty f = 10KHz)	I <sub>FP</sub>	300	mA
Soldering Temperature	T <sub>SOL</sub>	Max 240°C for 5 sec Max	

**OPTICAL-ELECTRICAL CHARACTERISTICS**
**(TA=25°C)**

Parameter	Symbol	Test Condition	Value			Unit
			Min	Typ	Max	
Luminous Flux	Φ <sub>V</sub>	I <sub>F</sub> = 150mA	10	13	-	lm
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 150mA	-	6.0	7.0	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 5V	-	-	10	μA
Viewing Angle at 50% I <sub>v</sub>	2θ <sub>1/2</sub>	I <sub>F</sub> = 150mA	-	110	-	Deg
Dominant Wavelength	λ <sub>D</sub>	I <sub>F</sub> = 150mA	450	-	460	nm

\*Tolerance of viewing angle: -10 / +5 deg.




ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.chromeled.com](http://www.chromeled.com)

## OPTICAL CHARACTERISTIC CURVES


**Fig.1-Forward Voltage Vs. Forward Current Intensity**

伏安特性曲线

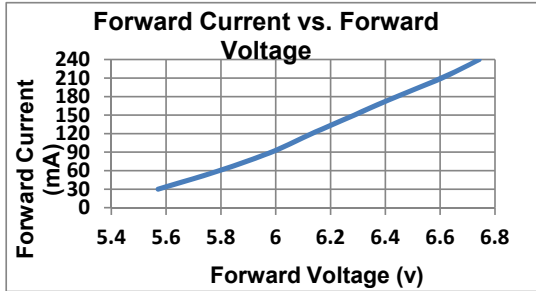


**Fig.2-Forward Current Vs. Relative**

正向电流与相对光强特性曲线

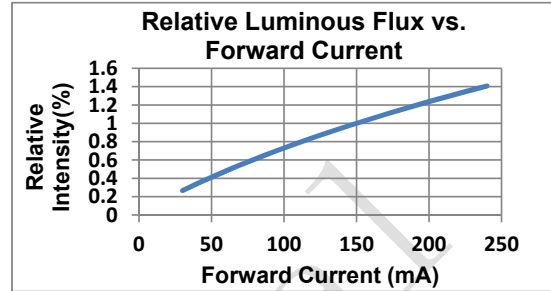


**Fig.3-Ambient Temperature Vs. Relative Intensity**

环境温度与相对光强特性曲线

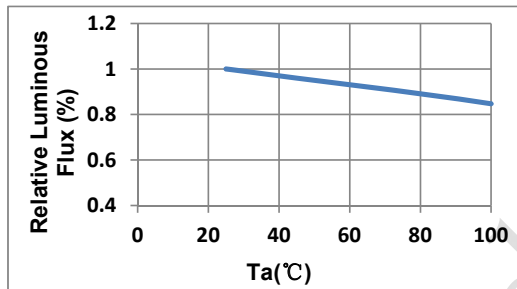


**Fig.4-Ambient Temperature Vs. Forward Current**

环境温度与正向电流特性曲线

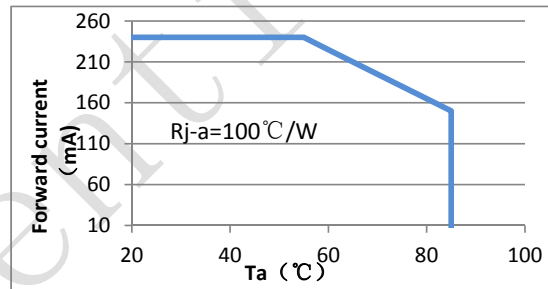


**Fig.5-Forward Voltage Vs. Ambient Temperature**

电压与环境温度特性曲线

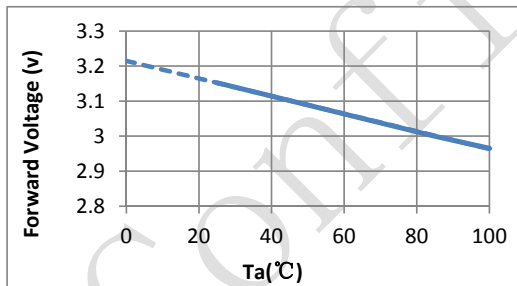


**Fig.6-Radiation diagram**

辐射特性曲线

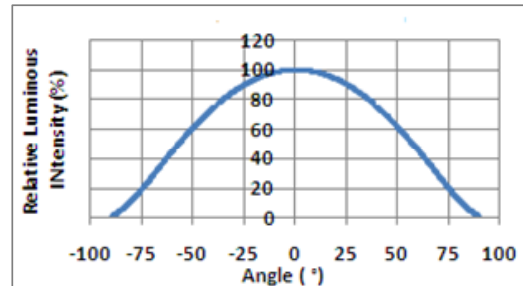


**Fig.7-Chromaticity Coordinate Vs. Ta**

色坐标与环境温度特性曲线

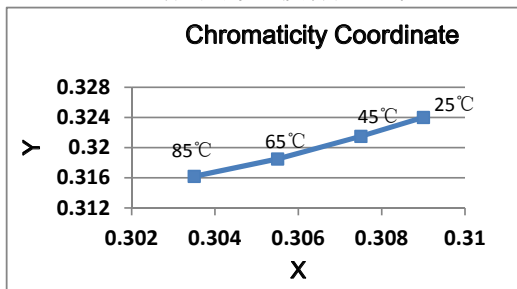


**Fig.8- Spectrum Distribution**

光谱分布特性曲线

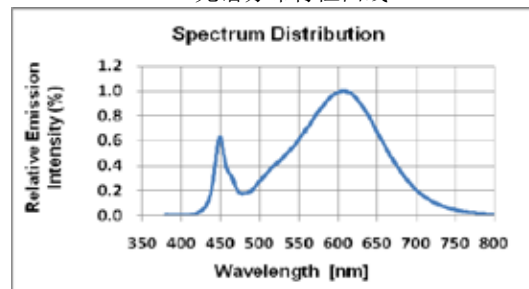

ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.chromeled.com](http://www.chromeled.com)

## PACKAGING SPECIFICATION

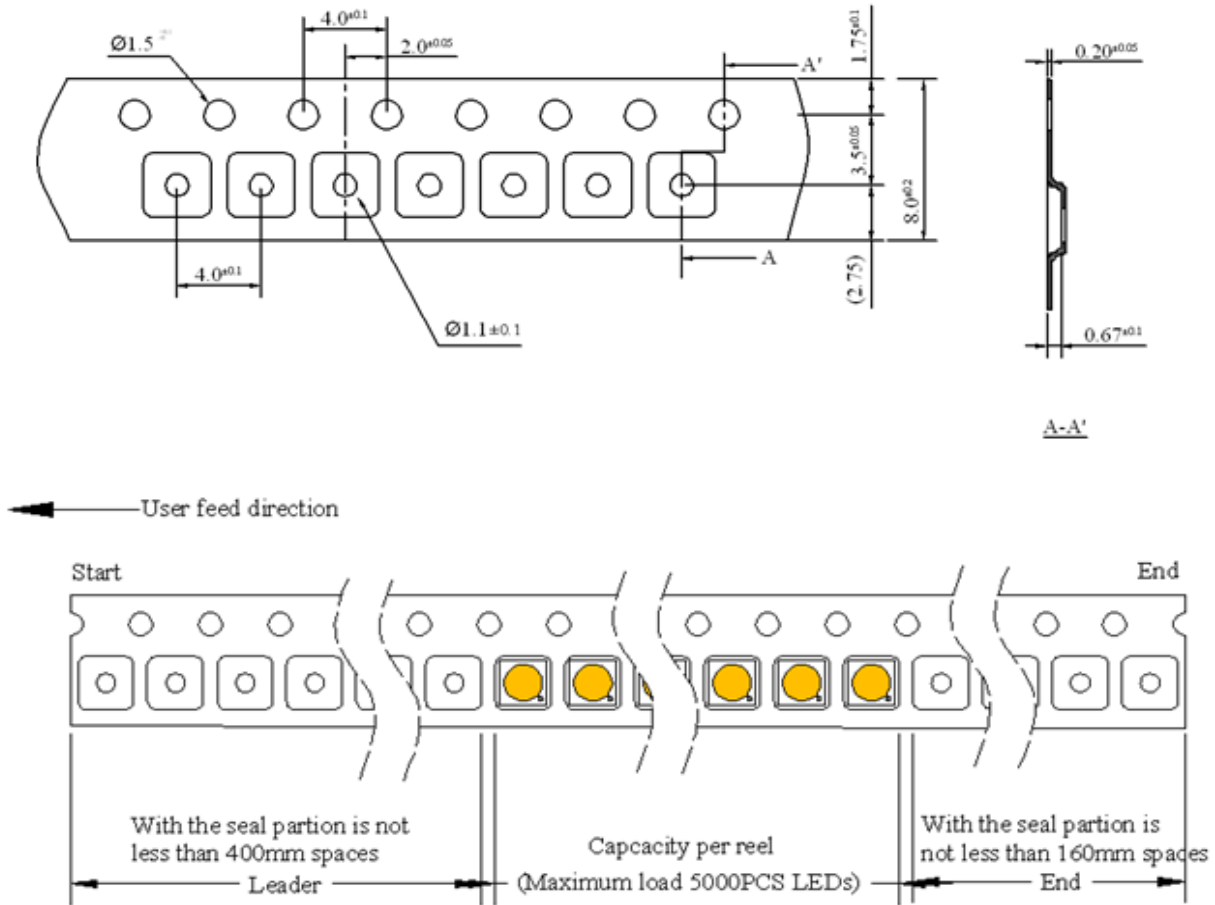


- Quantity : Max 5000pcs/Reel
- Cumulative Tolerance : Cumulative Tolerance/10 pitches to be  $\pm 0.2$ mm
- Adhesion Strength of Cover Tape Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at the angle of  $10^\circ$  to the carrier tape.
- Package : P/N, Manufacturing data Code No. and Quantity to be indicated on a damp proof Package.



ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.chromeled.com](http://www.chromeled.com)

# SOLDERING CONDITIONS

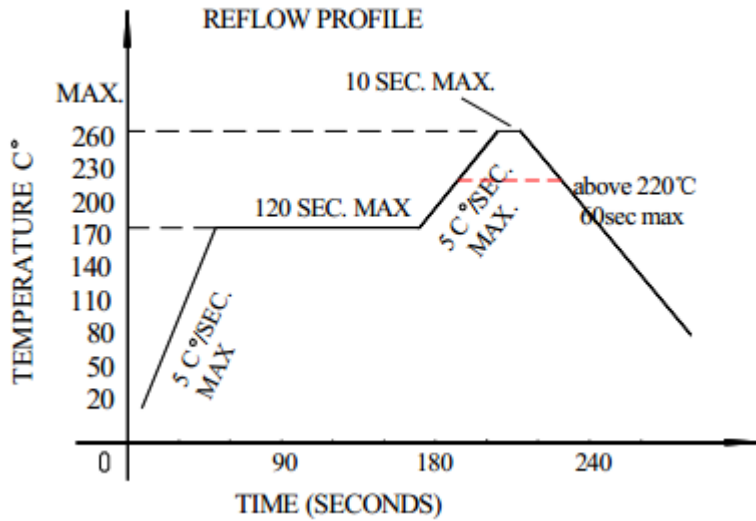

Reflow soldering		Hand Soldering	
Pre-heat	160~180°C	Temperature	300°C Max
Pre-heat time	120 Seconds Max	Soldering time	3 second Max
Peak temperature	260°C Max		
Soldering time	10 Seconds Max		
Condition	Refer to Temperature-profile		



ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.chromeled.com](http://www.chromeled.com)