


SPECIFICATION **CSP1311SB2C**
PACKAGE OUTLINES


- Notes:
1. All dimensions are in millimeters (inches).
 2. Tolerance is ± 0.25 mm (0.01") unless otherwise noted.
 3. Specifications are subject to change without notice.

Part Number	Chip Material	Color of Emission	Lens Type	Viewing Angle
CSP1311SB2C	InGaN	Blue	Water Clear	120°

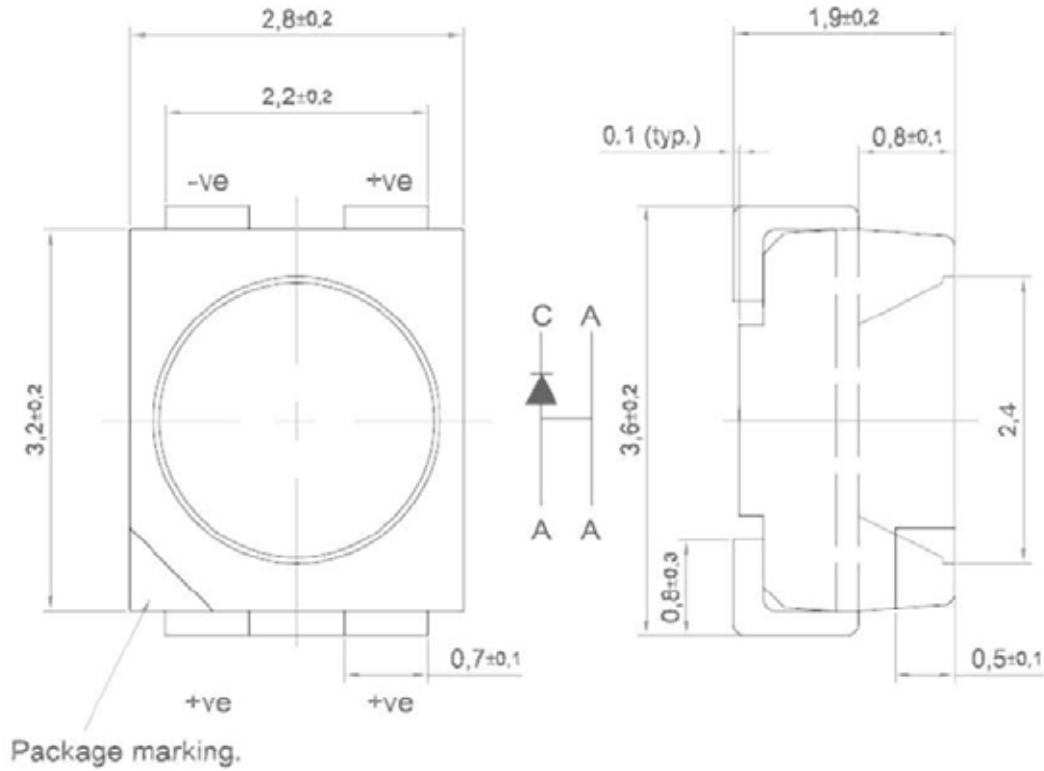

ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.chromeled.com

ABSOLUTE MAXIMUM RATINGS (TA=25°C)

Parameter	Symbol	Max Rating	Unit
Forward Current	I _F	50	mA
Reverse Current @ 5V	I _R	10	μA
Power Dissipation	P _d	200	mW
Operating Temperature Range	T _{OP}	-40~+110	°C
Storage Temperature Range	T _{STG}	-40~+110	°C
Peak Pulsing Current (1/10 duty f = 10KHz)	I _{FP}	100	mA
Soldering Temperature	T _{SOL}	Max 260°C for 5 sec Max	

OPTICAL-ELECTRICAL CHARACTERISTICS (TA=25°C)

Parameter	Symbol	Test Condition	Value			Unit
			Min	Typ	Max	
Luminous Intensity	I _v	I _F = 30mA	355	900	-	mcd
Forward Voltage	V _F	I _F = 30mA	-	3.3	4.0	V
Reverse Leakage Current	I _R	V _R = 5V	-	-	10	μA
Viewing Angle at 50% I _v	2θ _{1/2}	I _F = 30mA	-	120	-	Deg
Peak Wavelength	λ _P	I _F = 30mA	-	465	-	nm
Dominant Wavelength	λ _D	I _F = 30mA	-	470	-	nm


*Tolerance of viewing angle: -10 / +5 deg.




ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.chromeled.com

RADIATION PATTERN & RECOMMENDED SOLDER PAD

Radiation Pattern

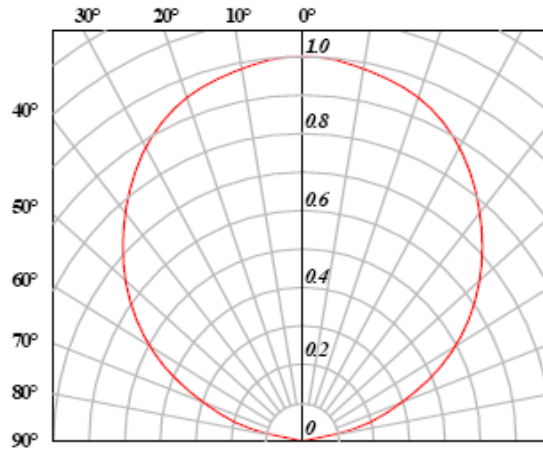

Recommended Solder Pad

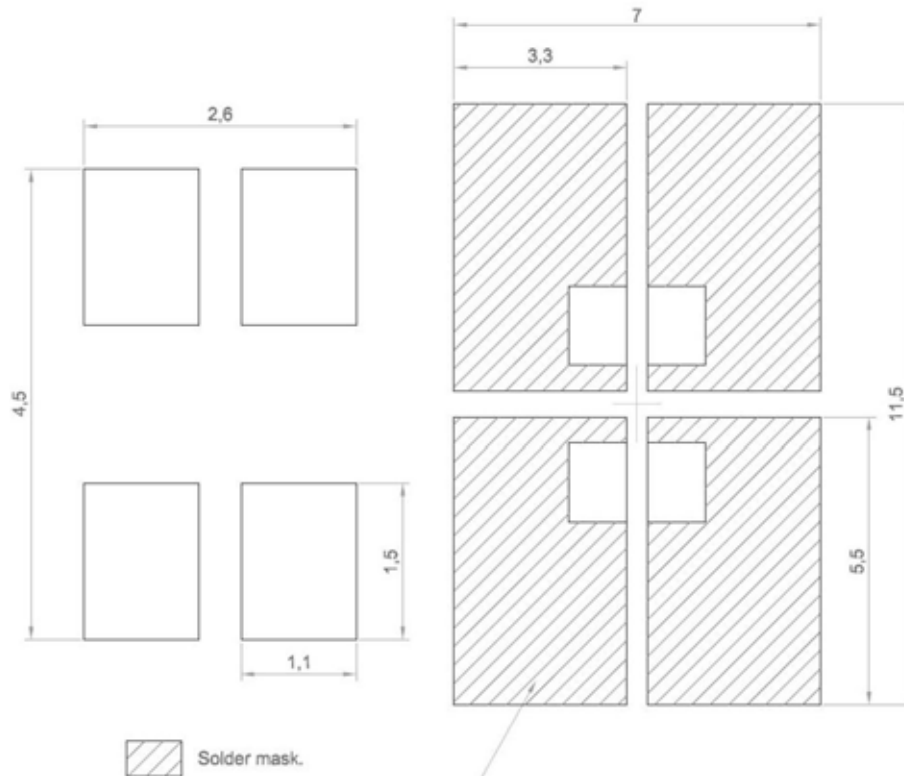


Additional Cu area for improved heat dissipation.
Cu area >16 mm sq per pad .
Electrically isolated with solder mask.




ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.chromeled.com

OPTICAL CHARACTERISTIC CURVES


Relative Intensity Vs Forward Current

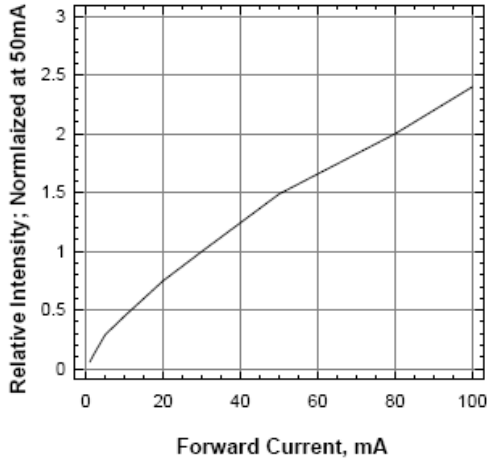


Forward Current Vs Forward Voltage

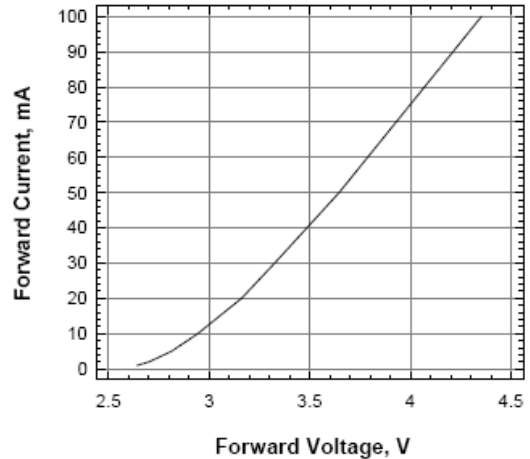


Maximum Current Vs Temperature

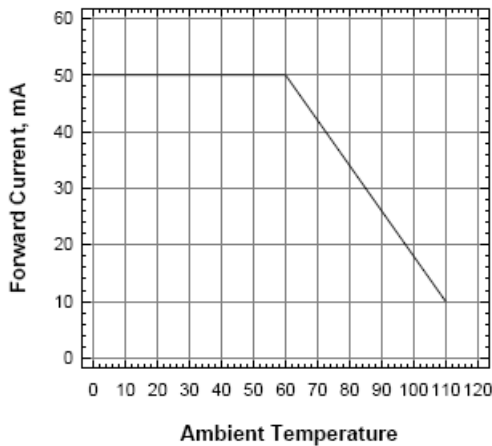


Relative Intensity vs Wavelength

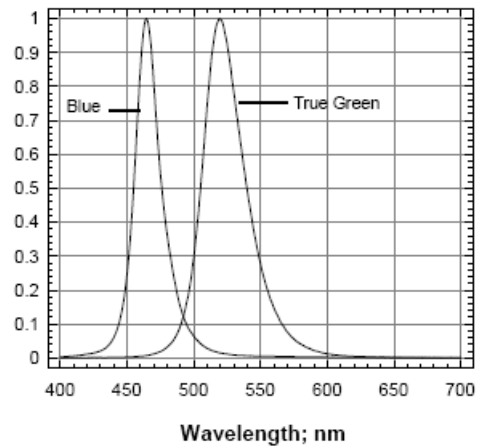

Wavelength Shift vs Forward Current (True Green)

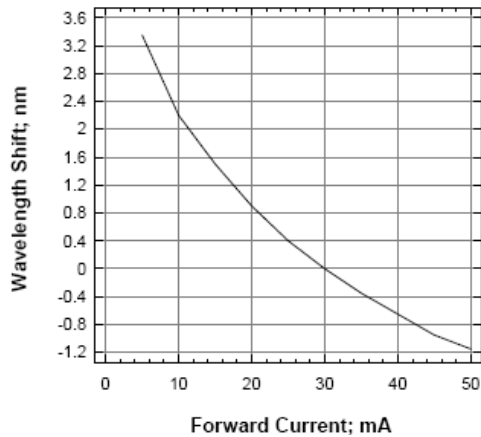

Wavelength Shift Vs Forward Current (Blue)

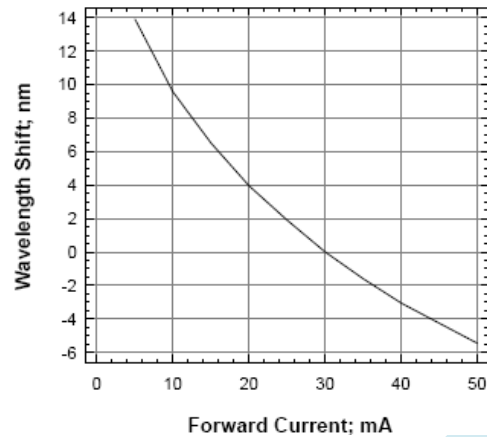

ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.chromeled.com

SOLDERING CONDITIONS

RECOMMENDED Sn-PB IR-Reflow Soldering Profile




RECOMMENDED Pb-Free Soldering Profile




ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.chromeled.com

PACKAGING SPECIFICATION

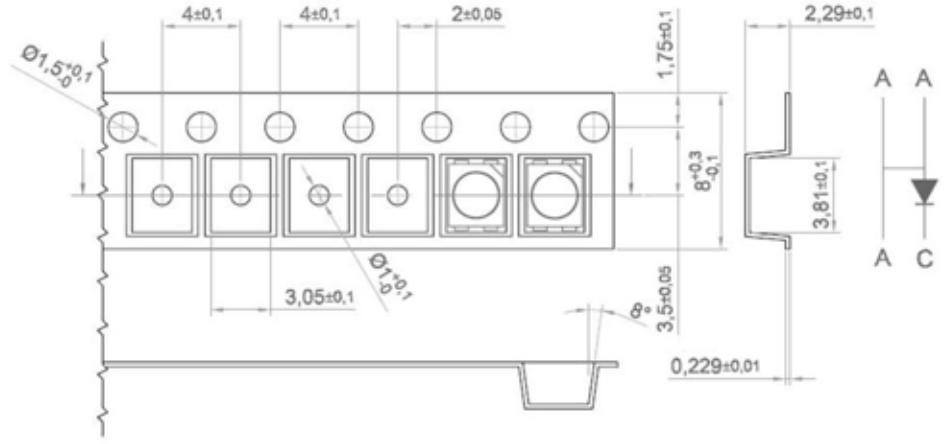

200 mm min. for $\varnothing 180$ reel.
 200 mm min. for $\varnothing 330$ reel.

480 mm min. for $\varnothing 180$ reel.
 960 mm min. for $\varnothing 330$ reel.

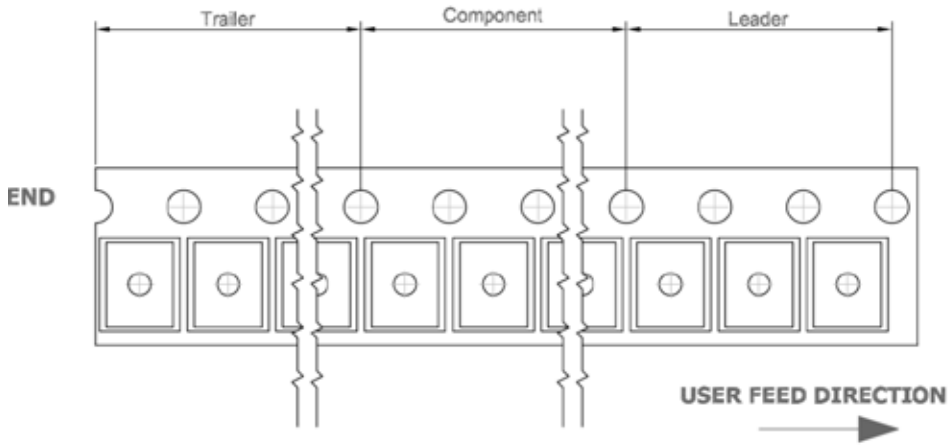

ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.chromeled.com